


SRS-P-E

manually operated, with suction nozzle

for safe, representative and closed sampling of aggressive or toxic media out of reactors and tanks – quick, reliable, without process interruptions.

Modular Design


The systems operate, i.e. extract the required sample by means of vacuum through the suction nozzle.

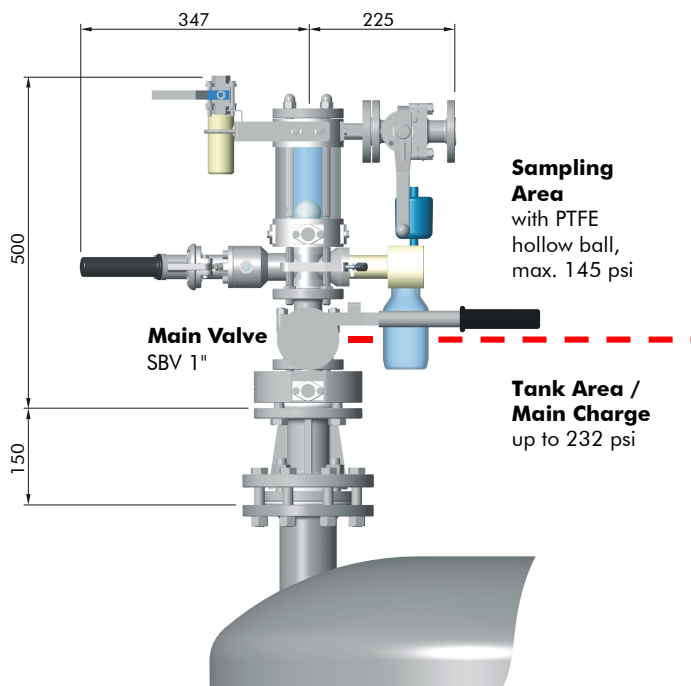

Main Features

- Robust construction, assuring easy and safe operation at any time
- Sampling volume standard 150 ml (5.07 oz) resp 250 ml (8.45 oz).
- Simple extension with additional components resp. upgrading of existing systems
- Main Valve standard 1"-150lbs, PFA-lined, manually operated (optional with SDV Diaphragm Valve, SCP Cylindrical Plug Valve or SBV Ball Valve)
- 2-hole mounting plates for easy installation of additional valves or connections
- Various reserve connections
- Ball seat made of Perfluor, for wear-free and reliable sealing of the PTFE hollow ball
- Flange connections acc. to ANSI (DIN optional)

Operating Conditions / PT Diagram

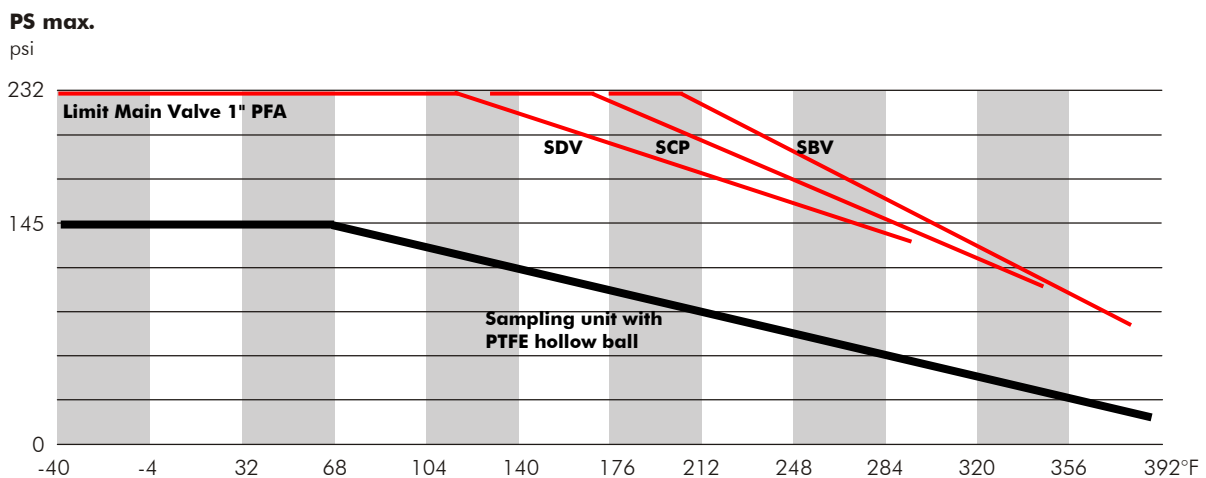

Testing / Marking

- Pressure- and tightness testing acc. to EN 12266-1, leakage rate A, resp. API 598.
- Marking of valves on body and name plate acc. to EN 19.
- Material- resp. test certificates acc. to EN 10204-3.1/2.2/2.1

Function of SRS-P-E manually operated, with vacuum through suction nozzle

